


- NOTES
1. INSTALL IN ACCORDANCE WITH MANUFACTURER'S INSTRUCTIONS.
  2. PROVIDE CONNECTION TO ELECTRICAL SERVICE PER NEC AND OSHA/DIOLC.
  3. PROVIDE CONNECTION OF GAS SERVICE IN ACCORDANCE WITH ANSI/ASFA 2203A.
  4. PIPE RELIEF VALVES TO 6" RAINWATER FLOOR WITH PROPER SUPPORT AND DRAIN CONNECTIONS TO NEAREST FLOOR DRAIN WHERE PRACTICAL.
  5. INSULATE ALL HOT WATER PIPING. ALSO INSULATE ALL FUEL PIPE OF SHIELD VALVE PIPE IS USED.
  6. PROVIDE MANUFACTURER'S START-UP SERVICES.
  7. TUBE REMOVAL CAN BE ACCOMPLISHED FROM THE FRONT OR REAR OF THE BOILER.

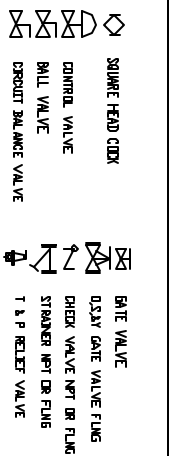

ITEM	QTY	DESCRIPTION	DATE	BY
1	1	LES TOLLER		
2	1	LES TOLLER		
3	1	LES TOLLER		
4	1	LES TOLLER		
5	1	LES TOLLER		
6	1	LES TOLLER		
7	1	LES TOLLER		
8	1	LES TOLLER		
9	1	LES TOLLER		
10	1	LES TOLLER		
11	1	LES TOLLER		
12	1	LES TOLLER		
13	1	LES TOLLER		
14	1	LES TOLLER		
15	1	LES TOLLER		
16	1	LES TOLLER		
17	1	LES TOLLER		
18	1	LES TOLLER		
19	1	LES TOLLER		
20	1	LES TOLLER		

**MELLNER**

HWSAMPLE

SAMPLE PIPING DIAGRAM ONLY